

## Stepclick Prime




### Package Details

Plank size: 193mm x 1205mm  
8 planks per box 1.86 m<sup>2</sup> 13.5 kg

## How is Laminate made?

**UNIFIT**®  
PATENTED TECHNOLOGY

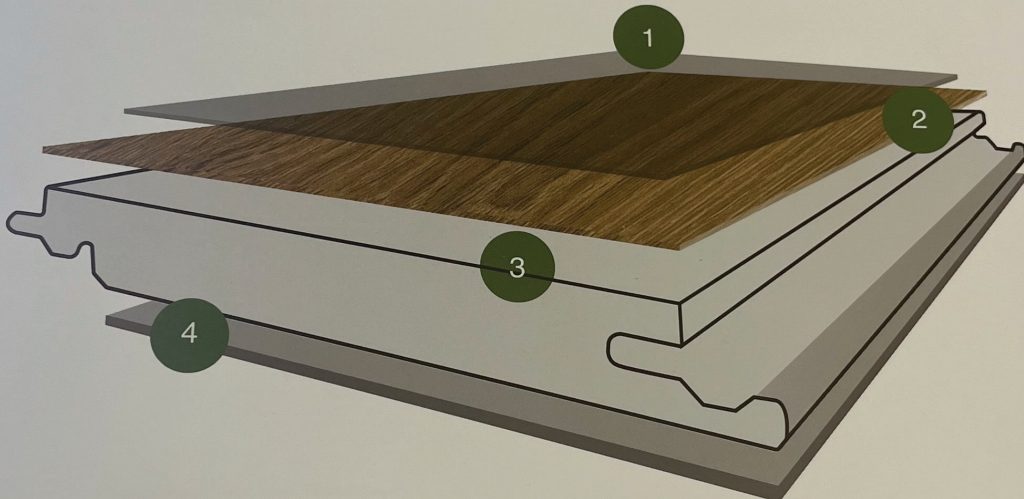

1

### AC4 Authentic wood appearance

Featuring a high-quality surface layer, this flooring offers outstanding resistance to wear and scratches. The embossed-in-register finish enhances both texture and realism, aligning perfectly with the wood grain for an authentic look and added surface protection.

2

### Decor Paper

Designed to reflect the unique characteristics of each product, this flooring combines distinctive patterns and textures that capture the essence of natural materials—delivering a visually striking and authentic finish.

3

### HDF

Made from high-density fibreboard, this robust core offers excellent pressure resistance and impact durability. Built to EN standards for long-lasting, reliable performance.

4

### Balance Paper

Protects against humidity and distortion



SAPPHIRE SHIMMER

SAPPHIRE SPARK

# Prime Benefits



Water Resistant




Resistant to UV rays



Underfloor heating



Quick Click




Resistant to point strikes



Easily Cleaned



Scratch resistant



Resistant To Furniture Wheel Abrasion

# Technical Specification

Description	Standard	Requirements	Results
Thickness		8 mm	EN 13329+A2
Width	mm	193	EN 13329+A2
Length	mm	1205	EN 13329+A2
Surface		Impact	
European Standard		15 Years Domestic Warranty 10 Years Commercial Warranty	EN 13329
<b>Package Details</b>			
Piece			8 planks per box
M <sup>2</sup>			1,861 m <sup>2</sup>
Kg			13,5 kg
<b>Pallet Details</b>			
M <sup>2</sup>			111,66 m <sup>2</sup>
Kg		840-850 kg	
Class		32	EN 13329+A2
Abrasion Resistance		AC4	EN 13329+A2
Thickness Swelling		≤18	ISO 24336
Surface Swelling (Assembled Joint)	Quantitative Rating	Rating (1-5)	Iso 4760 (Nalfa 24h)
	Quantitative Rating	mm	
Resistance To Impact	Small Ball	mm	EN 13329+A2
	Large Ball	mm	
Warranty Domestic / Commercial	Years	15/10	
Resistance to Staining		Min. 5 (group 1 and 2) Min. 4 (group 3)	EN 438-2_5
Surface Soundness	N/mm <sup>2</sup>	≥1.25	EN 13329+A2
Lock Strength	Length	kN/m	ISO 24334
	Width	kN/m	
Effect Of A Castor Chair	25.000 Cycles	No Damage	EN 425:2002
Effect Of A Furniture Leg	-	No Damage	EN 424
Opening Between Elements	mm	≤0.20	EN 13329+A2
Height Difference Between Elements	mm	≤0,15	EN 13329+A2
Moisture Content	%	4-10	EN 322
Fire Resistance	Class	CflS1	EN 9239-1
Formaldehyde Release	mg/m <sup>2</sup> h	≤3,5 (E1)	EN 12460-3
Slip Resistance	Class	DS	EN 13893:2003
Impact Sound Reduction	dB	14	EN ISO 10140-3
Thermal Resistance	(m <sup>2</sup> K)/W	0,05	EN 12664:2009
EIR-Register Emboss surface			

# Stepclick Prime Benefits

8-79




### Water Resistant

Spills happen, but stains don't have to. Our stain-proof material repels messes for effortless cleaning—plus, it's water-resistant for up to 72 hours, giving you even more time to wipe away worries.



### Resistant to point strikes

Engineered to withstand impact, designed for ultimate durability




### Resistant to UV rays

No fading, no worries - UV-resistant for all-weather toughness!



### Easily Cleaned

Clean in a snap minimal effort, maximum shine!




### Underfloor heating

This product is fully suitable for installation over underfloor heating, ensuring warmth from the ground up.




### Scratch resistant

Designed for longevity, this flooring offers reliable protection against everyday wear and tear. With its AC4 rating, it's also suitable for light commercial use combining durability with versatility.



### Quick Click

Enjoy quick click installation with a precision-engineered locking system no glue, no mess, just fast, secure fitting for a flawless finish in no time.



### Resistant To Furniture Wheel Abrasion

Smooth moves, no damage abrasion resistant against furniture wheels!

## Technical Specification

Description	Standard	Requirements	Results
Thickness		8 mm	
Width	mm	193	EN 13329+A2
Length	mm	1205	EN 13329+A2
Surface		Impact	EN 13329+A2
European Standard		15 Years Domestic Warranty 10 Years Commercial Warranty	EN 13329
Package Details			8 planks per box 1,861 m <sup>2</sup>